

## HEDGE MOWER *Mod. FB serie PG*

(Professional range with parallelogram geometry, for 90-140 HP tractors)



### Standard equipment:

- Oil cooler with thermometer;
- Locking tie rods with holding bracket;
- **Parallelogram geometry** of the arms;
- **Hydraulic breakaway with nitrogen accumulator and automatic position resetting;**
- Reversible rotation of the rotor;
- Semi-automatic 3 point hitch;
- Adjustable levelling roller on the flail head;
- “Y” blades with handle;
- Flexible cables for remote control;
- Removable front hood of the flail head;
- Mechanical safety retainers for transport on road;
- Floating system on the first arm and on the rotor;
- **Flail head of 120 cm with belts transmission;**
- Telescopic extension of 90 cm. (Mod. 610T);
- Rear protecting bar (without lights);
- **95° rotation** of the first arm;
- Head rotation of 245°;
- Oil tank of 140 lt.
- **55 HP available on the rotor;**
- PTO 540 rpm;
- Accident prevention protections according to EC directives;

### MODEL

### WEIGHT Kg.

**FB/PG 510** with 40 blades  
**FB/PG 610T** with 40 blades


(with oil)  
1250  
1400

### ACCESSORIES

Difference for set of double edge hammers  
Lights set, c/w cable and plug  
Electric control with multifunction ergonomic lever  
Electric control with “proportional flow” system  
Oil-pneumatic suspension  
Hydro-electric suspension  
Cutting bar of 150 cm with motor and couplings

### OPTIONALS ON REQUEST

Suggested universal joint: 70 HP 1000 N  
70 HP 1000 FW

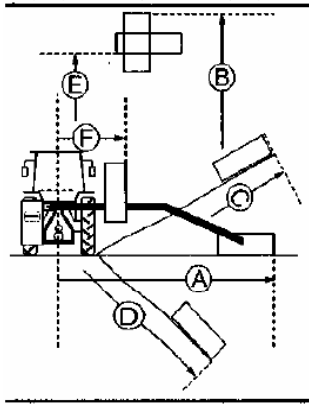

Model	A cm	B cm	C cm	D cm	E cm	F cm
FB/PG 510	510	640	490	470	580	150
FB/PG 610T	600	740	570	545	670	160



Mod.	Max length cm.	Power absorbed		Oil tank lit.	Head width cm.	Power on the rotor HP	Min. weight of tractor Kg.	Weight Kg.
		HP	KW					
FB/PG 510	510	70-80	51-59	140	120	55	3900	1250
FB/PG 610T	600	75-85	55-63	140	120	55	4300	1400

