

New
PRODUCT BULLETIN



SKID STEER ROTARY CUTTER



The SC2660 Rotary Cutter has an eye pleasing smooth top design for easy maintenance and clean running. It is designed for attachment to skid steers having 1500 to 3000 psi operating pressure and hydraulic flow rates in the 11-16 gpm, 17-21 gpm, or 18-27 gpm ranges. Attachment is made quick and easy with the standard universal skid steer floating-hitch mounting plate.


The float capability also makes operation very user friendly over uneven ground. An integral hydraulic relief valve is also standard equipment to protect the motor and hydraulic system against overloading. The skid steer must be equipped with a case drain system.

The SC2660 comes standard with a single row front chain guard and a double row rear chain guard to protect against thrown objects. A lift-limit chain is also provided as standard equipment to ensure that the cutting deck is not accidentally raised above 18" during operation. If your skid steer is not equipped with an Operating Protective Door Shield, one can be obtained from Land Pride.

The SC2660 Skid Steer Rotary Cutter by Land Pride will expand the versatility of your skid steer to take on mowing jobs on ranches, farms, nurseries and construction sites as well as a host of other commercial and municipal sites. The SC2660 features a 60" cutting width and a cutting height infinitely variable from 1.5" to 18". An optional, highly durable single front-mounted pivoting gauge wheel with a laminated tire is available to follow the ground contour and help control the preset cutting height. Four corner skid shoes are also available to keep the cutter from bottoming out.

SC Series Skid Steer Rotary Cutter

Cutting Height	1.5" to 18" infinitely variable
Cutting Width	60"
Overall Width	65-1/2"
Overall Length	73"
Cutting Capacity	2" Diameter
Blade Rotation	Clockwise
Blades & Blade Carrier	1/2"x 4" Updraft, Heavy Duty Round Pan Stump Jumper
Hitch	Universal Floating-Hitch Mounting Plate Centered or Right Offset
Double Deck Design Construction	Lower Deck: 10 Gauge; Upper Deck: 16 Gauge
Side Skirt Construction	1/4" Steel
Front Deck Protection	Single Row Chain Guard, Standard Equipment
Rear Deck Protection	Double Row Chain Guard, Standard Equipment
Deck Lift Height Protection	Safety Chain Limiter
Deck Wear Protection - Optional	Four Corner Mounted Skid Shoes - Standard or Heavy
Operator Protection	Protective Door Shield Std. (Deduct Option)
Preset Cutting Height Gauging	Pivoting & Adjustable Front Mounted Gauge Wheel w/ Laminated Tire
Low Volume Drive Motors	For hyd. systems with 11-16 GPM flow at 1500-3000 PSI; 88 ft. lbs. torque at 2500 PSI
Medium Volume Drive Motors	For hyd. systems with 17-21 GPM flow at 1500-3000 PSI; 117 ft. lbs. torque at 2500 PSI
High Volume Drive Motors	For hyd. systems with 18-27 GPM flow at 1500-3000 PSI; 152 ft. lbs. at 2500 PSI
Low Volume Motor Max Blade Tip Speed	18,540 FPM at 16 GPM
Med. Volume Motor Max Blade Tip Speed	19,340 FPM at 21 GPM
High Volume Motor Max Blade Tip Speed	19,200 FPM at 27 GPM

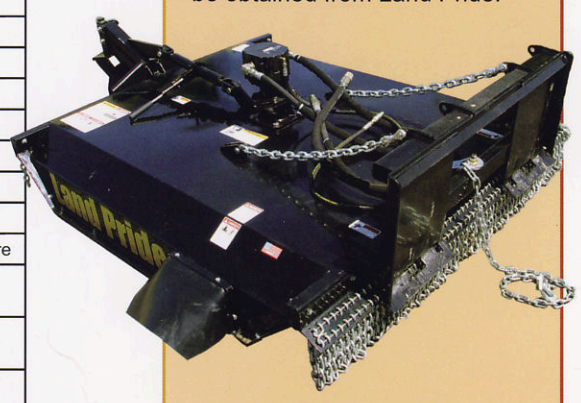

PO Box 5060 • Salina, KS 67402
www.landpride.com