


PRODUCT INFORMATION



Trailed MoCo
KMR3501



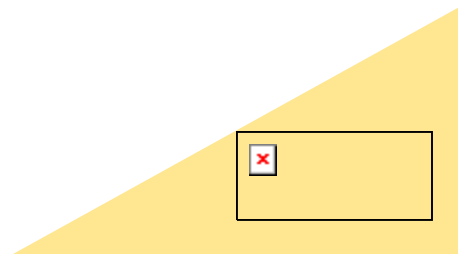

PRODUCT INFORMATION

Trailed MoCo KMR3501

Description of most important features:

- Independent, pulled mower in a carrier frame
- Follows the field contours extremely well (**Free Float Suspension System**)
- Mower can raise and lower independently of the carrier (more than 40 cm)
- Easy Adjusting of the cutting height with a handle
- Rough adjustment with adjustable skids (3 positions)
- Wedge shaped full protected cutter bar with skids and stone guards
- Lower linkage arms mounted (cat II) with full swivel hitch
- 3 blades per disc
- Wheels and tyres 10.0- 75 x 15.3 AS
- 2 segmented conditioner rollers over the full width (both driven)
- Adjustable swath doors





PRODUCT INFORMATION

Trailed MoCo KMR3501

TECHNICAL SPECIFICATIONS

| MODEL | KMR 3501 |
|-----------------------------|--------------------|
| Working width (m) | 3,50 |
| Feet/Inches | 11'4" |
| Transport width (m) | 3,50 |
| Feet/Inches | 11'4" |
| Weight (kg/US lbs) | 2005/4420 |
| Number of wheels | 2 |
| Tyre size standard | 10.0/75x15.3AS |
| Required horsepower (Kw/hp) | 63/90 |
| PTO-speed | 540 rpm |
| Type of linkage pins | CAT II |
| Number of discs | 10 |
| Number of knives | 30 |
| Disc rpm | 2650 |
| Blade length (mm/Inch) | 107 |
| Knife cutting speed (rpm) | 70 |
| Roller speed (rpm) | 890 |
| Swath width (m/Inch) | 0,8-1,50/2'8"-5'5" |

