



New Product

Yield-Pro® Planters

Simply load a bulk seed box container directly onto the back of the Yield-Pro planter and start planting, it's that easy. Bulk boxes hold 2500 lbs. of seed or approximately 42 bu., if you don't have access to bulk seed boxes attach the poly bulk tank which holds 82 bushel. The Yield-Pro planter also offers an optional 400-gallon starter fertilizer system.

The patented air manifold delivers seed on demand to the mini row unit hoppers without any moving parts increasing reliability while decreasing maintenance costs. On the row unit, interchangeable precision finger-pickup meters or Singulator-Plus Meters accurately singulate the seed into the planter seed tubes.


The Yield-Pro openers feature 15" offset double disk blades with your choice of 2.5", 3", or 4" side depth wheels. Press wheel options include: 1x12, 1.25 wedge, or Zipper wheels. Openers also feature up to 500 lbs. of down pressure per opener.

A variety of row spacing options are available for the Yield-Pro Planter which include 30", 20", 15" and Twin-Row 30" spacing that can be harvested with a 30" corn head. Other options include: Veris hydraulic drives and Keeton seed firmers.



Key Features

- Telescoping Tongue is short in the field enhancing maneuverability on headlands.
- Using seed companies bulk box with treated seed keeps operator safer than breathing treatment dust when filling individual hoppers.
- No planted rows are run over on 30" or twin-row models. Only 2 rows are run over on 15" spacing, unlike competitors 4 to 6 run over rows on their 15" models.
- Easy access to all row units regardless of spacing.
- All seed and fertilizer weight is carried on the independent center frame and not transferred to the toolbars. All row units plant the same regardless of whether on not the unit is full or empty.
- Twin row combined with bulk seed increases productivity by up to 40%.

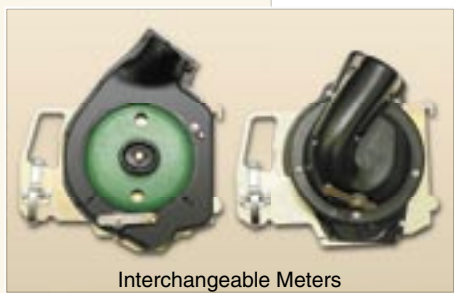

Interchangeable Meters



New Planter Row Unit Design



Wedge Press Wheels

YIELD-PRO

Specifications

YP-1625 Planter

ROW UNIT CONFIGURATIONS



Narrow Transport



Central Bulk Fill



State-of-the-Art Air Delivery



Center Flex



Telescoping Tongue




14.9" x 46" Bar Tires



Low-Profile Flat Fold Markers



400 Gal. Starter Fert Option

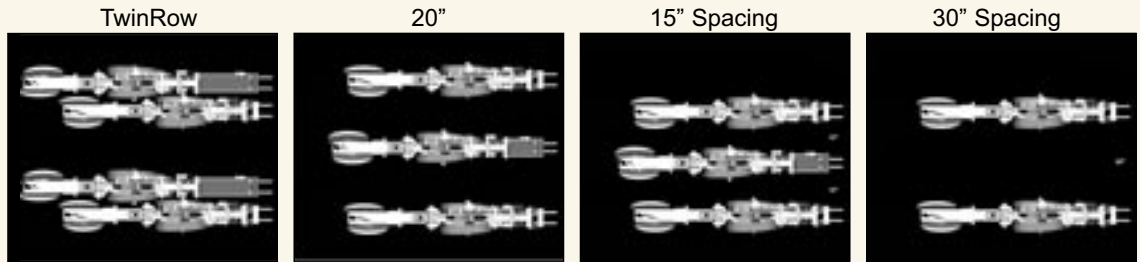

FEATURES & BENEFITS

FEATURE	BENEFIT
Narrow Transport	One of the narrowest in the industry without the complicated pivot mechanisms
Central Bulk Fill	Ability to plant directly from a Pro-Box [®] or the optional 82bu. poly hopper
Air Delivery System	Patented manifold distributes seed on demand without any moving parts
Center Flex	Allows the planter to fit on terraces and matches cornhead
Telescoping Tongue	Short tongue allows for tight turns on turn rows extends to support wings in transport
14.9" x 46" Bar Tires	Big tires roll easy with a big footprint for minimum compaction
Low Profile Markers	Reduces transport height and helps keep the machine out of trees on first round
400 Gallon Starter	Optional 2-200 gallon tanks allow bulk fill options for starter fertilizer

OPTIONAL EQUIPMENT

Flat Fold Markers (deduct)	Unit Mount Coulters	Fluted, Wavy, or Turbo Blades
Choice of Press Wheels	400 Gal Liquid Fertilizer Kit	Seed-Lok
Keeton Firmers	Terra-Tine Row Cleaners	Veris Hydraulic Drive

SPECIFICATIONS

Model Name	YP-1625
Transport Width	12' 4" (30", 20", 15" spacing), 13' 6" (Twin Row Spacing)
Working Width	40'
Transport Length	40' 3"
Transport Clearance	22"
Transport Height	12' 1"
**Weight (APPROX.)	19,450 lbs (Twin-Row), 14,900 lbs. (16 Row)
Row Spacings	Twin Row, 15", 20", 30"
Number Of Openers	32-Twin Row, 31-15", 24 -20", 16-30"
Seed Hopper Capacity	Pro-Box System (Box Not Included) ,82 bu. Poly Hopper (Optional)
Tire Size	Rear 14.9R46 8-Star, Wing 395/55b16.5 NHS
Opener Travel	10"
Opener Depth Range	0 to 4"
Opener Down Pressure	200 to 500 lbs.

P.O. Box 5060 ● Salina, Kansas 67402

(785) 823-3276 ● FAX (785) 822-5600

Visit us at our web site: <http://www.greatplainsmfg.com>

